




RLX - RT

NEW RANGE

From 200 to 1030 mm





RLX - RT

NEW RANGE

From 200 to 1030 mm


THE FEATURES

- Very high stiffness
- High rotation accuracy
- High geometric quality
- **Interchangeability with market established standard**
- Short assembling time

Perfect for applications requiring a high positioning accuracy:

- Rotary and Indexing Tables
- Machining Centers
- Milling Machines
- Drilling Machines
- Etc...

|| || Drawing || ||

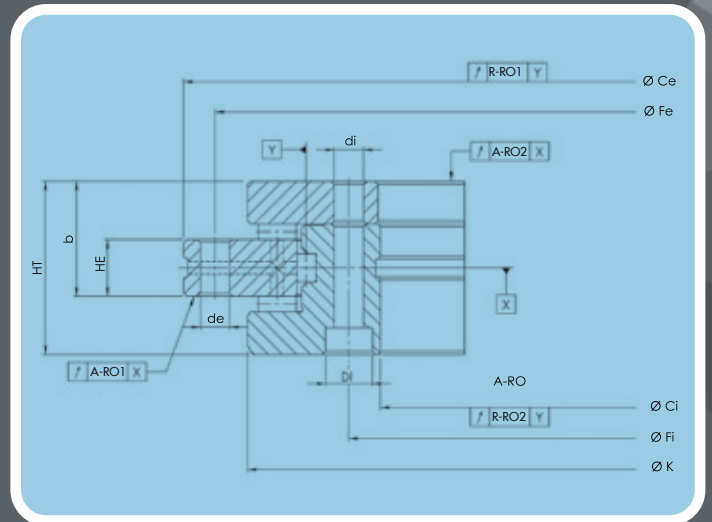

REFERENCES	WEIGHT		DIMENSIONS						FASTENING						AXIAL RUN-OUT		RADIAL RUN-OUT		STARTING TORQUE UNLOADED in Nm	ALLOWABLE MAX ROTATION SPEED in rpm	
	Kg	Dm	Ce	Ci	K	HT	HE	b	Fe	de	Ne	Fi	DI	di	Ni	OR μ	IR μ	OR μ			IR μ
RT 200	9,7	255	300	200	274	45	15	30	285	7	45	215	11	7	46	4	4	4	4	15	170
RT 260	19	317	385	260	345	55	18	36,5	365	9,3	33	280	15	9,3	34	6	6	6	6	25	130
RT 325	25	391	450	325	415	60	20	40	430	9,3	33	342	15	9,3	34	6	6	6	6	35	110
RT 395	33	464	525	395	486	65	20	42,5	505	9,3	45	415	15	9,3	46	6	6	6	6	50	90
RT 460	45	535	600	460	560	70	22	46	580	9,3	45	482	15	9,3	46	6	6	6	6	70	80
RT 580	90	670	750	580	700	90	30	60	720	11,4	42	610	18	11,4	46	10	10	10	10	140	60
RT 650	170	758	870	650	800	122	34	78	830	14	42	680	20	14	46	10	10	10	10	200	55
RT 850	255	981	1095	850	1018	124	37	80,5	1055	18	54	890	26	18	58	12	12	12	12	300	40
RT 950	312	1085	1200	950	1130	132	40	86	1160	18	54	990	26	18	58	12	12	12	12	600	40
RT 1030	375	1170	1300	1030	1215	145	40	92,5	1255	18	66	1075	26	18	60	12	12	12	12	800	35



ROLLIX DEFONTAINE S.A.
FRANCE

Tél. 33 (0)2 51 45 94 94
Fax 33 (0)2 51 45 92 80
info@rollix.com

www.rollix.com